


Senor POS

V4s



SE **N**OR

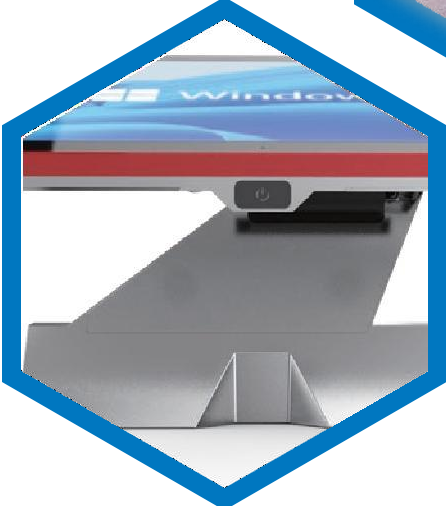

- Intel Celeron Processor
- Tool-free replaceable colorful bezel with full flat touch screen
- Easy tilt and swivel adjustment
- Various I/O ports options
- Variety POS peripherals
- Capacitive sensor power switch
- Fanless and Silent
- Full system IP54



V4s features a brand new concept to present an ultra-narrow bezel screen and sleek exterior design with colorful bezel and casing to represent your elegant style. The V4s is an energy-efficient solution of compact construction with fanless mechanism fitted in a high-performing system enabling for a quiet, highly reliable and stylish operation.

The standard version includes a removable PCIex4 SSD. Read and write speed of The PCIex4 SSD is double as fast as SATA SSD which gives the operating system a smoother environment.


The V4s offers new edge to edge design of touch panel, featuring a mix & match range of modular colored bezel frames; creating a visually pleasing appeal.

V4s is the ideal companion for all requirements of hospitality and retail business industries specialists.

POS World Technologies Private Limited

Banglore Office: 2nd Block, 2nd A Main Road, ManjunathaNagar, Kalkere Extn, Bengaluru 560016
Contact No: +91 90361 97007, **Email:** alex@posworld.in

Mumbai Office : 183/45, Milap Soc. Charkop Sector 1, Kandivali West Mumbai, Maharashtra-400067
Contact No: +91 98333 72222 **Email:** sales@posworld.in



SE-NOR



POS World Technologies Private Limited

Bangalore Office: 2nd Block, 2nd A Main Road, Manjunatha Nagar, Kalkere Extn, Bengaluru 560016
Contact No: +91 90361 97007, **Email:** alex@posworld.in

Mumbai Office : 183/45, Milap Soc. Charkop Sector 1, Kandivali West Mumbai, Maharashtra-400067
Contact No: +91 98333 72222 **Email:** sales@posworld.in

Specification



V4s


System		
Processor	Intel Celeron J6412 (1.5MB Cache, up to 2.60 GHz)	
Display	15" LED-backlit TFT LCD, 1024x768	
Touchscreen	PCT (Projected Capacitive Touch)	
Memory	1*4GB, 2*DDR4 SODIMM sockets, max. 32GB	
Storage	1*128GB PCIe Gen3x4 NVMe M.2 2280 SSD, 1*SATAIII M.2 2242 expansion socket	
TPM	Intel PTT / TPM 2.0	
Speakers	2*2W	
Dimensions & Weight	365(W)*193(D)*290(H) mm, 5.5 Kgs	
Operating system	Windows 10 IoT Entry, Windows 11 IoT Entry	
Ports & Power	I	II
LAN port	1*RJ45 (10/100/1000 Mbps)	
External Display port	1	
USB port	4*USB2.0, 2*USB3.0	
COM port	4*RJ48 (RS232)	3*RJ48 (RS232)
Cash drawer port	N/A	1*RJ11 (24V)
Audio port	1*3.5 mm CTIA (Line-out/Mic-In)	
Power	100~240V, 50/60Hz	
Environment & Certification		
Operating Temp. & Humidity	0~40°C, 10~90%RH	
Storage Temp. & Humidity	-20~60°C, 10~90%RH	
EMC, Safety & IP rating	CE/FCC, IP54	
Peripheral Options		
Wireless LAN	802.11 a/b/g/n/ac, Bluetooth	
Customer display	AMON 10 / M15 series (Touch available), VFD 2x20 Line Display	
2D Scanner	1D & 2D barcodes, USB I/F	
Card reader	Magnetic card reader (MSR), 3 tracks, USB I/F	
	Smart card reader (SCR), ISO-7816 compatible, USB I/F	
Identification Device (3 choose 1)	Fingerprint reader, 512 dpi, 8-bit grayscale, USB I/F	
	iButton reader, USB I/F	
	RFID reader, 13.56MHz, USB Virtual COM I/F	

POS World Technologies Private Limited


Bangalore Office: 2nd Block, 2nd A Main Road, Manjunatha Nagar, Kalkere Extn, Bengaluru 560016
Contact No: +91 90361 97007, **Email:** alex@posworld.in

Mumbai Office : 183/45, Milap Soc. Charkop Sector 1, Kandivali West Mumbai, Maharashtra-400067
Contact No: +91 98333 72222 **Email:** sales@posworld.in

V4 I/O options



I

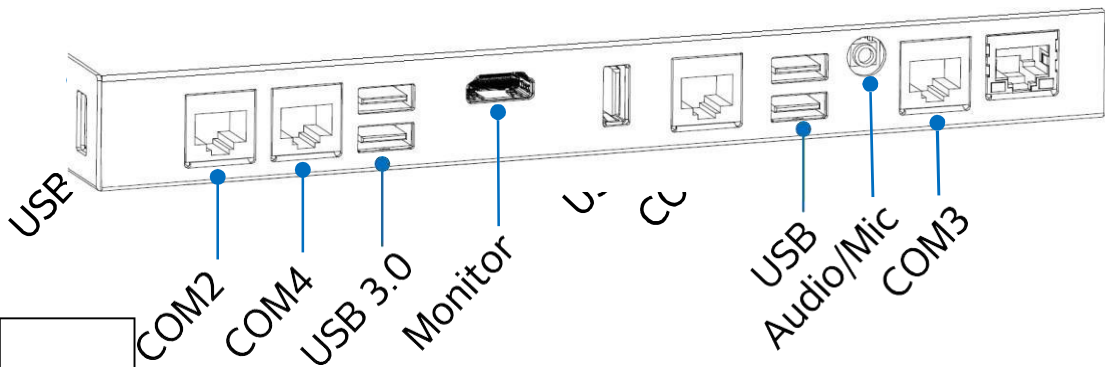

II

